


Upasil® 60 TLC Silica

Allgemein

Upasil® 60 TLC ist finely grounded silica for use in thin layer chromatography.

Besides the pure silica, there are grades available containing binder (gypsum) and / or fluorescence indicator (F254nm).

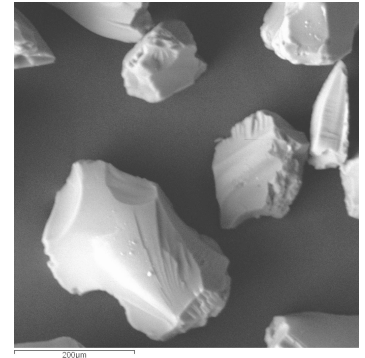

Parameter	Unit	Range
specific surface area	m ² /g	450-650
pore volume	ml/g	0.6-0.8
pH		6.5-7.5
particle size	µm	<40

Products	standard	+ Binder	+ F254	+Binder + F254
	Upasil® 60TLC	Upasil® 60G	Upasil® 60 F254	Upasil® 60 GF254

additional information

other particle sizes and specifications are available on request.

Packaging

Upasil® 60 TLC is available in 10kg steel drums.

Issue 04.2016

Information contained herein is based on our supplier's present knowledge and experience and does not release the customer from conducting his own comprehensive tests. A legally binding guarantee, also regarding possible rights of third parties, is expressly denied. Our products are sold according to our General Terms of Sales and Delivery.